

# Web Width Measurement — Analog Output — SCU5

Quick Start Guide

**Controller:** SCU5 | **Output:** Analog Output | **Sensor:** ODC 48 | **Configuration:** Dual Sensor



Scan for  
interactive guide

---

## What You'll Achieve

After completing this guide, wired to your SCU5 D+ controller with web width output as a voltage or current signal for your PLC, drive, or display.

**Estimated time:** ~2–3 hours

## What You Need

### SCU5 Analog

- [ ] ODC Family sensor — sized for your web width (full sizing guidance under Install)
- [ ] **SCU5** D+ controller (analog output)
- [ ] Quick Disconnect Sensor Cable - 3m (10 ft) (U2-01975)
- [ ] 24 V DC Input Power Cable, Length 5 m (21218-5m)
- [ ] Analog Output Cable - 5m (U2515-71)
- [ ] 24 VDC power supply
- [ ] For dual sensor: second ODC Family sensor + second sensor cable (U2-01975)

**Which controller variant?** The SCU5 D+ outputs the live width value as an analog voltage/current signal (the "+" is the analog-output option; D = Display/touchscreen). For GO/NO-GO pass/fail monitoring see the Digital path (DIO+ adds the analog value alongside the pass/fail outputs); for networked width, edge, and centerline data see the Ethernet path (C(x)D+).

### Prerequisites

- [ ] Machine accessible and safe to work on
- [ ] 24 VDC power available at the installation location
- [ ] For Ethernet paths: Ethernet network ready (switch port available, IP address planned)

- [ ] For digital monitoring paths: stacklight, alarm, or PLC digital input wired and ready
- [ ] Web material available for initial setup and teach operations
- [ ] A sample of known width on hand for the teach correction/offset step

## 1. Install the Sensor

---

Edge-based web width measurement always uses free span mounting (web unsupported between rollers). Install the sensor so that the length of the sensor is parallel to the cross-machine direction (the width direction of the web).

### Dual Sensor Setup

- Position the left sensor to see the left edge, right sensor to see the right edge
- Critical: mount both with the same camera (physical) orientation, but set their electronic orientation oppositely — the left sensor tracks the left edge, the right sensor the right edge
- Each sensor needs margin for the full range of web widths (min to max) plus wander
- Sensors do not need to be the same size — select each based on wander range at its edge

**Light source:** Infrared (IR) — default for most materials.

**Sensor size selection:** Single sensor: sensing range must exceed max web width + wander. Dual sensor: each sensor covers its respective edge + wander. If no single sensor is wide enough, use dual sensor.

**Dual Sensor Installation:** For dual-sensor width measurement, mount both sensors with the same camera orientation (facing the same direction). Then set their electronic orientation so that, relative to the web, one sensor tracks the left edge and the other tracks the right edge — see Sensor Installation Recommendations for orientation details.

## 2. Wire the System

---

Sensor(s) to SCU5, then analog output to your system.

1. Sensor: Connect Quick Disconnect Sensor Cable (U2-01975) from ODC Family sensor to SCU5 port S1
2. For dual sensor: connect second Quick Disconnect Sensor Cable (U2-01975) to SCU5 port S2
3. Power: Connect 24 V DC Input Power Cable (21218-5m) to SCU5 port P1
4. Analog: Connect Analog Output Cable (U2515-71) from SCU5 Port 2 to your PLC/drive/display


**Caution:** The analog output is isolated. Do NOT connect these pins to 24 VDC power — the voltage and current signals are generated by the controller.

**Dual Sensor Wiring:** Connect second sensor cable to controller port S2.

### Wiring Diagram

## Wiring Diagram

SCU5 — Ethernet Output

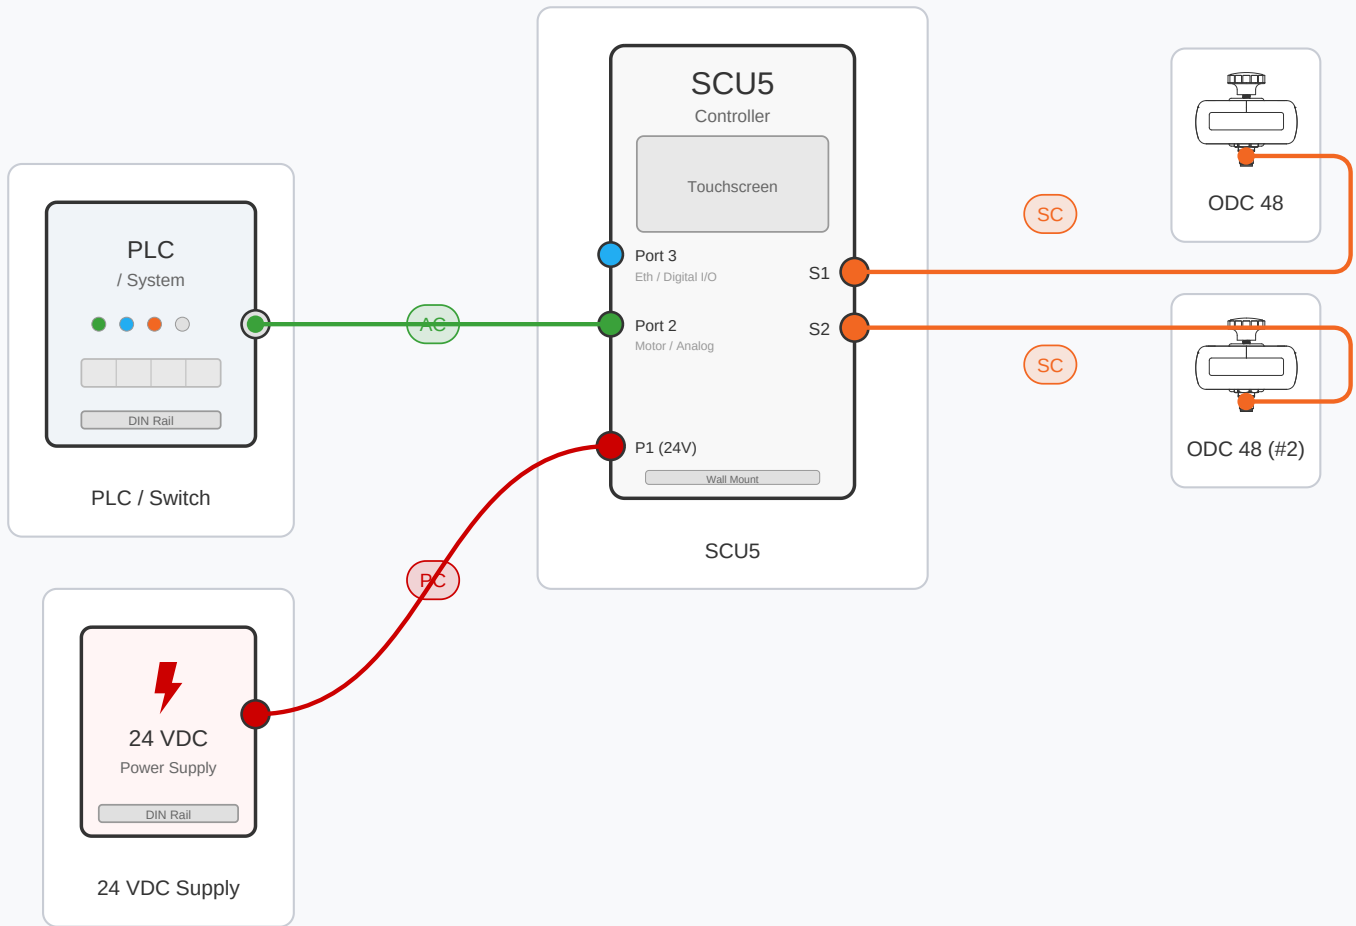

(SC) = Sensor Cable (PC) = Power Cable (AC) = Analog Cable

## Bill of Materials

| Qty | Item                                       | SKU      | Connection                        |
|-----|--------------------------------------------|----------|-----------------------------------|
| 1   | Quick Disconnect Sensor Cable - 3m (10 ft) | U2-01975 | sensor.connector ? controller.S1  |
| 1   | 24 V DC Input Power Cable, Length 5 m      | 21218-5m | power.output ? controller.P1      |
| 1   | Analog Output Cable - 5m                   | U2515-71 | controller.Port2 ? plc.input      |
| 1   | Quick Disconnect Sensor Cable - 3m (10 ft) | U2-01975 | sensor2.connector ? controller.S2 |

### 3. Configure & Verify

Web width measurement computes the distance between the detected left and right edges. The controller computes the width internally and provides the value directly.

#### Dual Sensor Width

Two sensors — one per edge — with the controller computing total width including the distance between sensors. Use when the web is wider than any single sensor. Not available for 1DC.

1. Set each sensor's electronic orientation first — left sensor ? left edge, right sensor ? right edge — then perform single-sensor configuration for each
2. Teach offset: place a known-width sample so both sensors see their edges
3. Enter the known width value and press the Teach Offset button
4. The controller computes the distance between sensors and stores it
5. Optionally perform teach correction after teach offset for better repeatability

Teach offset = one-time during installation (re-teach only when sensors are physically moved). Teach correction = optional per product change. Final width = raw measurement + offset + correction.

**What success looks like:** Both sensors show green indicators, width reflects the full web width, changing products produces the expected width change.

#### Common Configuration Mistakes

- Not re-teaching correction after product change — measurements drift with a different material
- Forgetting teach offset — width will be wildly incorrect (missing distance between sensors)

#### YOUR PRODUCTS

##### ODC 48

- [Product Page](#)
- [2D Drawing \(PDF\)](#)
- [3D Model \(STEP\)](#)



Scan for product info

##### SCU5

- [Product Page](#)
- [SCU5 User Manual](#)
- [2D Drawing \(PDF\)](#)
- [3D Model \(STEP\)](#)

- [User Manual](#)
- [Wiring Diagram](#)



Scan for product info

## Go Further

### Related Quick Start Guides

- **Multiple Web Width Measurement** — Measure multiple strips or webs simultaneously (SCU6x only)
- **Position Measurement** — Measure edge, centerline, or contrast/line position
- **Splice Detection** — Add splice detection alongside width measurement

#### Need Help?

Email: [experts@r2r.tech](mailto:experts@r2r.tech) | Phone: +1-888-290-3215