


Highly Accurate Sensors Can Also Be Adaptive

Eliminate Calibration. These Sensors Learn and Adapt on the Fly

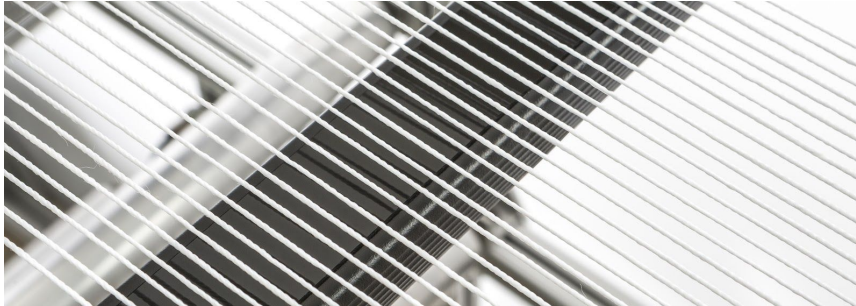

WPS 440 by Roll-2-Roll Technologies is a versatile sensor with a 440 mm sensing window, and multiple functionality. The sensor technology requires no setup or calibration. The sensing principle relies on light scattering and spatial filtering properties of fiber optics to accurately determine the features on the web. The 440 mm sensor version is suited for edge

guiding applications with frequent width changes, web width measurement, center guiding, etc. The sensor is also used in simple inspection applications such as thread counting, string coverage, void detection, etc. The sensor technology adjusts automatically to the physical characteristics of the material and provides an accurate position measurement. Roll-2-Roll Sensors are essentially an affordable vision based sensing system for different web sensing applications.

Sensor Type	Fiber optic	Light Source	Infrared, White Light, Ultraviolet
Sensor Resolution	0.125 mm or 0.0635 mm	Sensor Accuracy	> 99.2%
Sensor Range	440 mm	Number of Pixels	3540 or 7080

BENEFITS

- **Increase productivity** with no setup and calibration after product changeover
- **Integrated lighting** eliminates external lighting and need for gantry to mount external lighting
- **Save time** with plug-and-play installation and operation
- **Save money** with much less expensive alternative to vision systems
- **Save money** with a single solution for multiple sensing applications instead of warehousing multiple sensors

To order (direct from factory):

By phone: **+1-888-290-3215 ext 01**

By e-mail: **sales@r2r.tech**

Online: **<https://r2r.tech/request-quotation>**

Your local contact is:

