

*SCU5 C(E)D/C(P)D*

SC


Sensor 1

Sensor 2

*E: Ethernet*

*A: Analog*

*P: 24V DC*

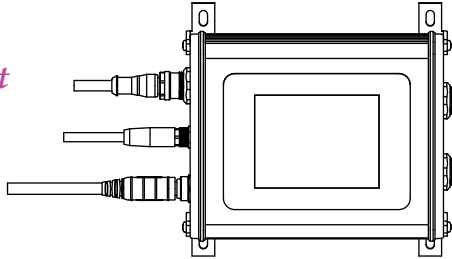

Recommended to use two of the same sensors with one controller.

*SC: Quick Disconnect Sensor Cable  
M12 12-pin shielded cable Male and Female cordset*

*E: M12 to RJ45  
M12 4-pin D-coded M12 to RJ45 Ethernet Cable*

*A: Analog Output Cable  
M8 3-pin analog output cable flying lead*

*P: 24 V DC Input Power Cable  
DC Power Connector 2.5mm tip for 24V DC Power flying lead*