


Web Guide Actuator

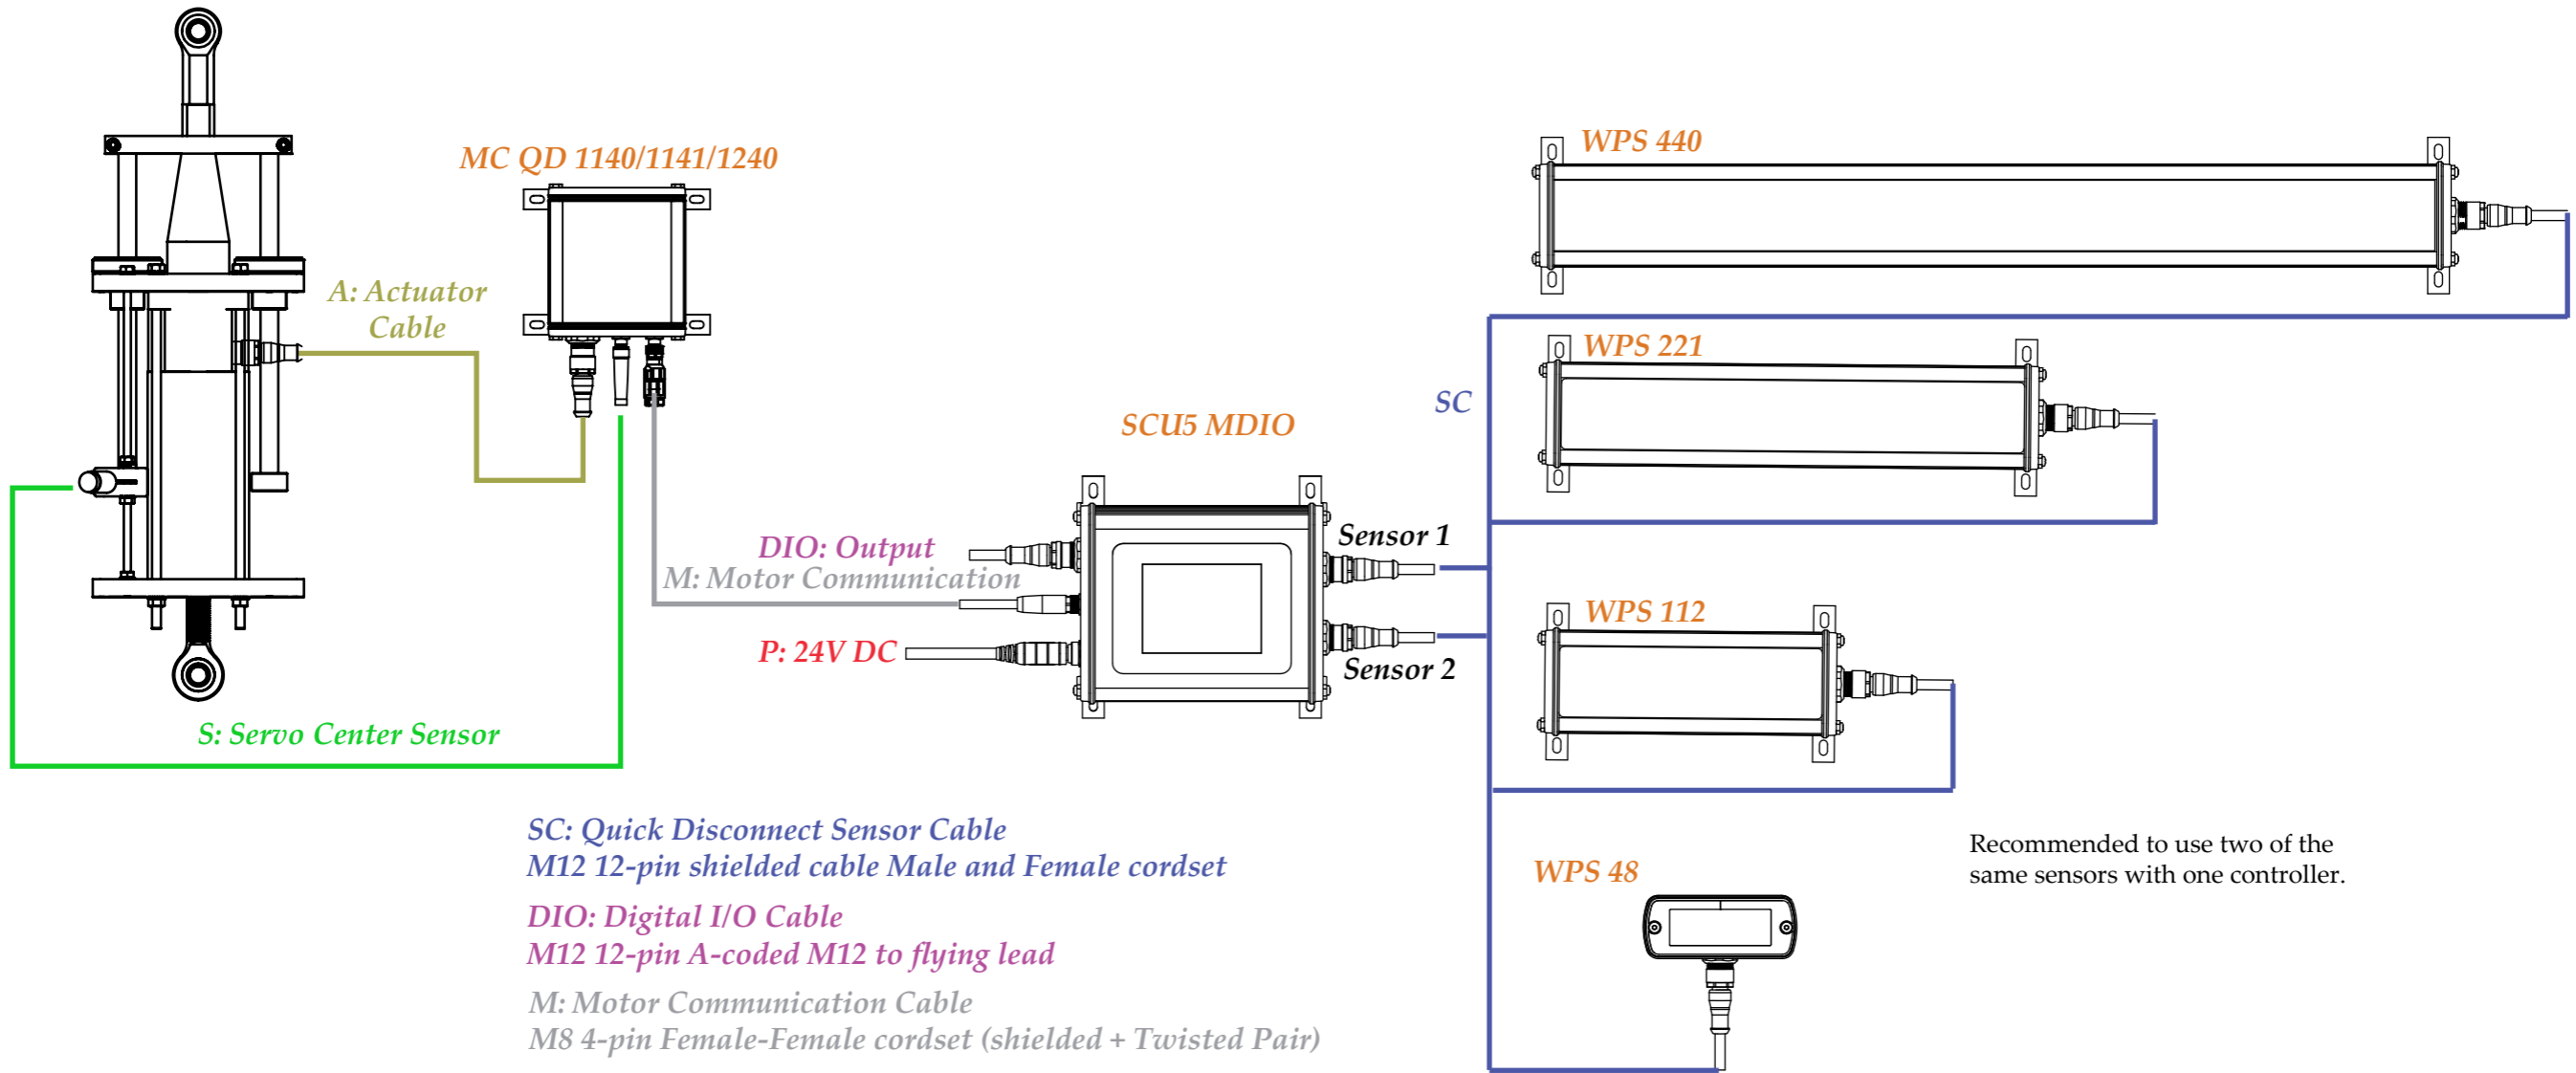

MC QD 1140/1141/1240

A: Actuator Cable

S: Servo Center Sensor

SCU5 MDIO

DIO: Output
M: Motor Communication

P: 24V DC

Sensor 1
Sensor 2

SC

WPS 440

WPS 221

WPS 112

WPS 48

Recommended to use two of the same sensors with one controller.

SC: Quick Disconnect Sensor Cable
M12 12-pin shielded cable Male and Female cordset

DIO: Digital I/O Cable
M12 12-pin A-coded M12 to flying lead

M: Motor Communication Cable
M8 4-pin Female-Female cordset (shielded + Twisted Pair)

P: 24 V DC Input Power Cable
DC Power Connector 2.5mm tip for 24V DC Power flying lead