
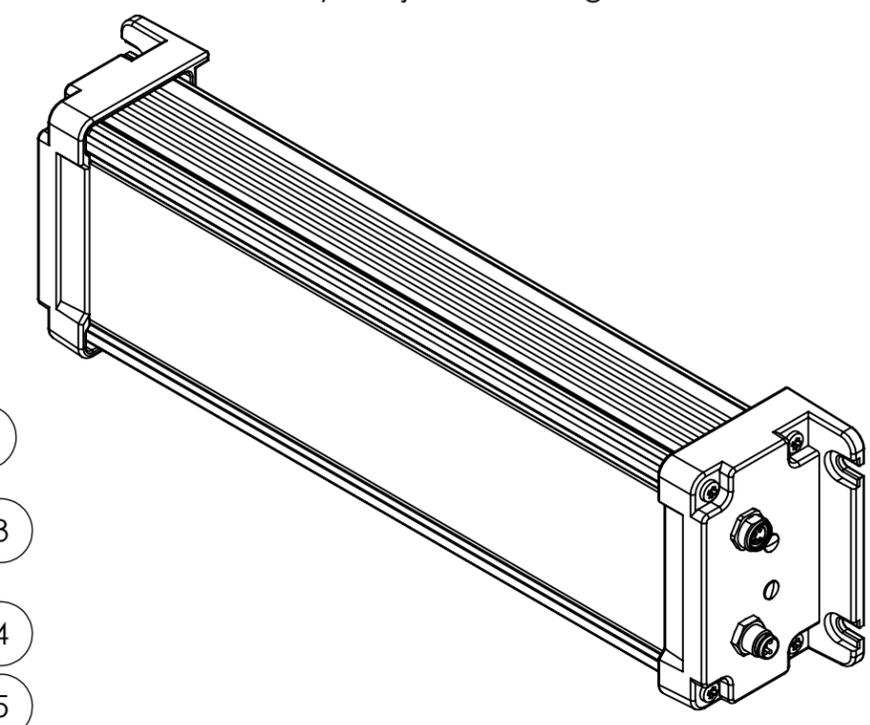
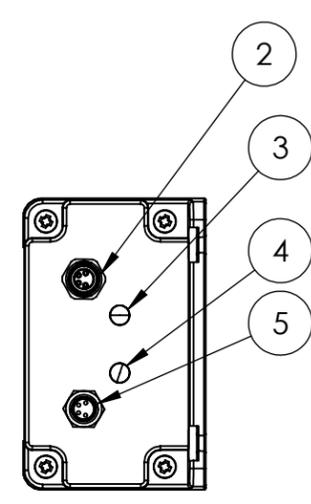


8 7 6 5 4 3 2 1

For reference only, subject to change without notice

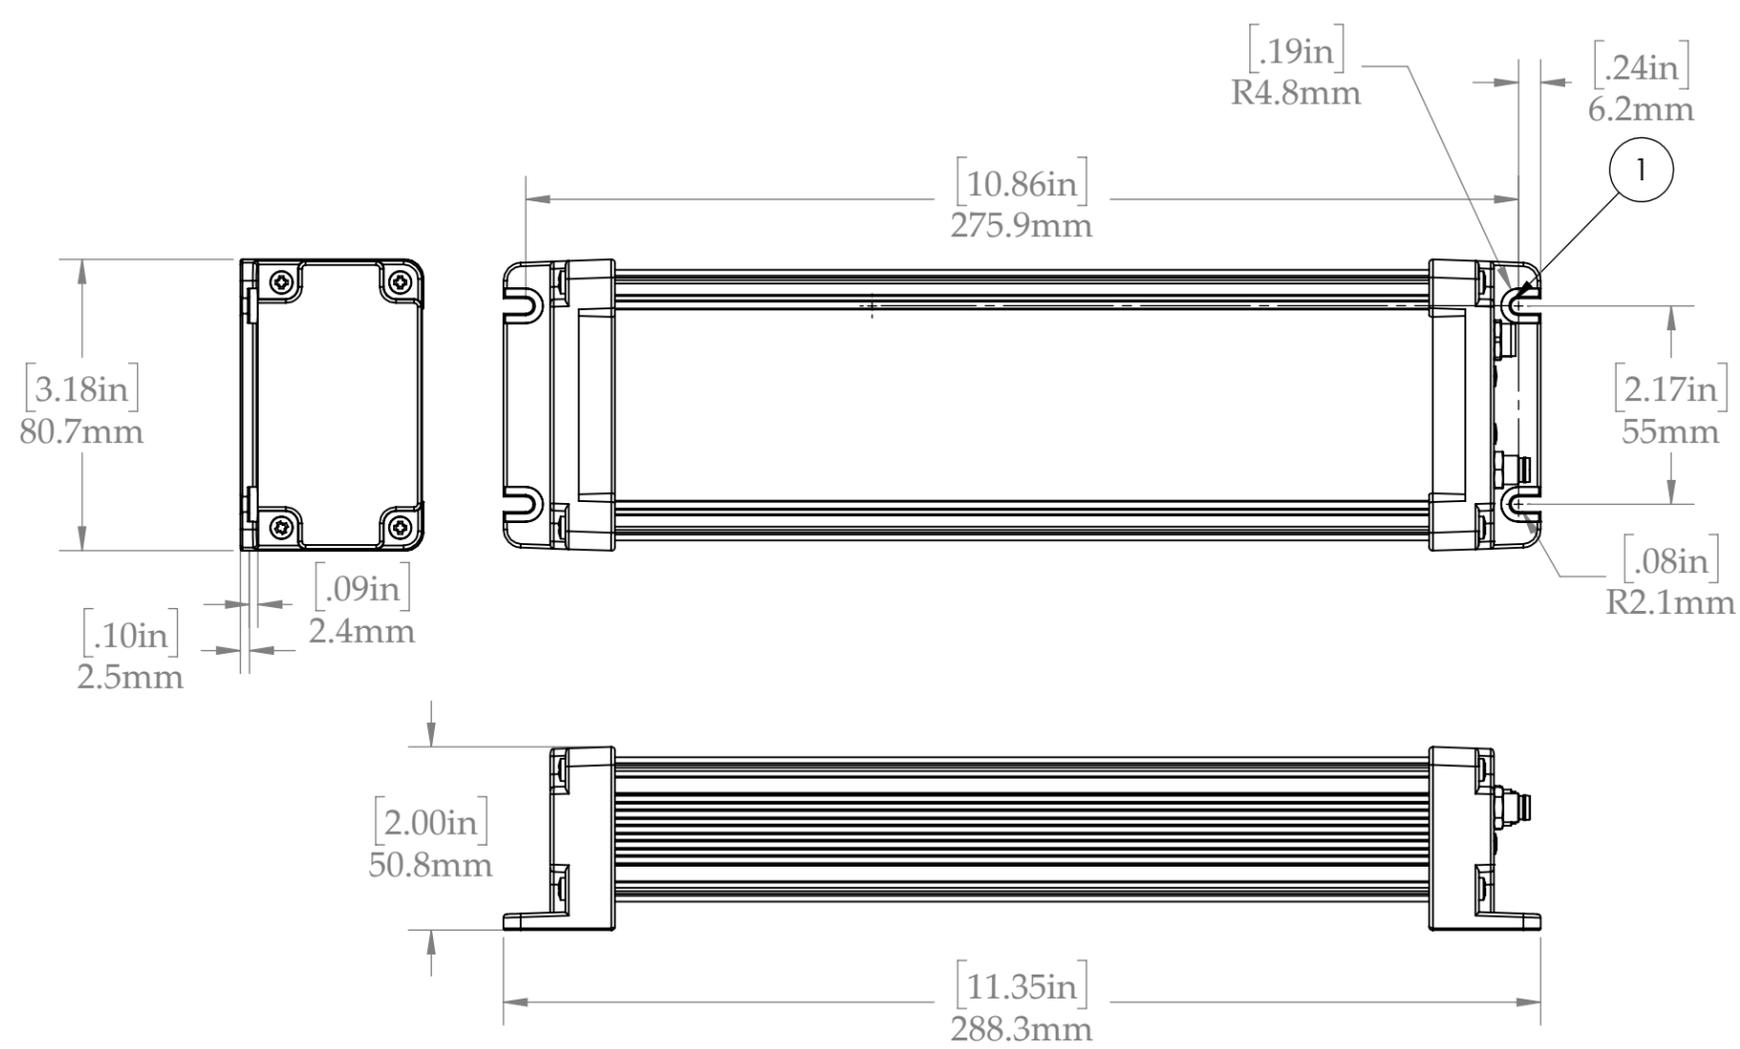

- 1 Mounting Hole: Use M4 or 6-32 or 8-32 screws
- 2 M8 4-Pin Female A Coded Ethernet Connector
- 3 Link/Activity LED
- 4 Network Status LED
- 5 M8 4-Pin Male A Coded Power Connector

PROPRIETARY AND CONFIDENTIAL NOTICE
ALL INFORMATION ON THIS SHEET IS THE SOLE PROPERTY OF
Roll-2-Roll Technologies LLC.
All Rights Reserved. © Copyright 2025.



UNLESS OTHERWISE SPECIFIED:
 ALL DIMENSIONS ARE IN MM
 TOLERANCES UNLESS NOTED:
 INCH MILLIMETER
 X.X ±0.040 X.X ±1
 X.XX ±0.02 X.XX ±0.5
 X.XXX ±0.0075 X.XXX ±0.25
 THIRD ANGLE PROJECTION
 DO NOT SCALE DRAWING

	NAME	DATE
DRAWN	AS	01-APR-25
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		
COMMENTS:		

Roll-2-Roll Technologies		
Website: https://r2r.tech		
Phone: +1-888-290-3215		
Email: engineering@r2r.tech		
TITLE: 1DC 192-xx QD No Mounting Bracket		
SIZE	DWG. NO.	REV
B	1DC 192-xx QD	
SCALE: 1:2	WEIGHT:	SHEET 1 OF 1

8 7 6 5 4 3 2 1