

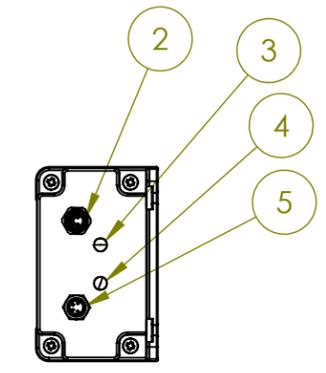


8 7 6 5 4 3 2 1

For reference only, subject to change without notice

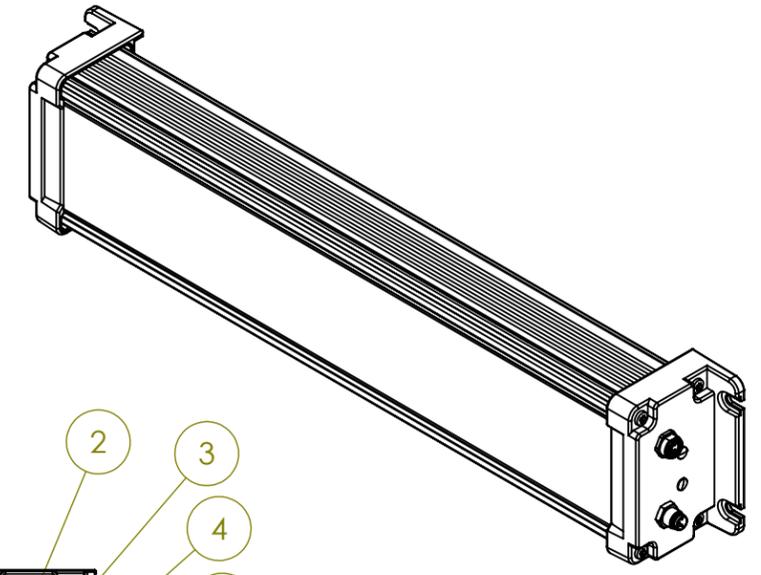

- ① Mounting Hole: Use M4 or 6-32 or 8-32 screws
- ② M8 4-Pin Female A Coded Ethernet Connector
- ③ Link/Activity LED
- ④ Network Status LED
- ⑤ M8 4-Pin Male A Coded Power Connector

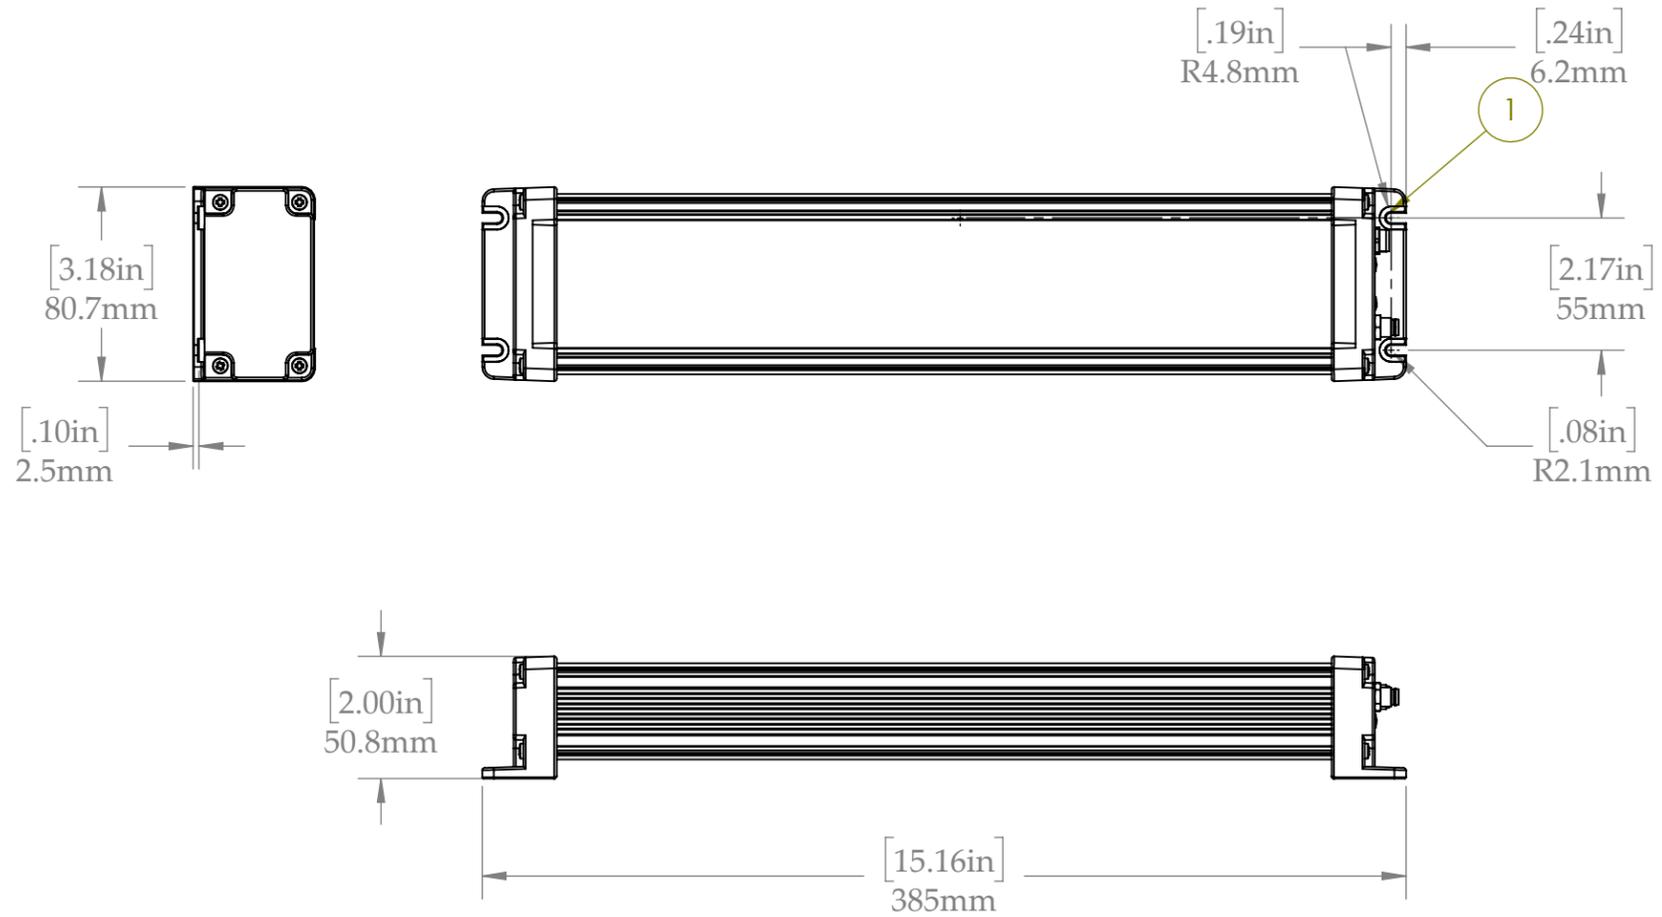

**PROPRIETARY AND CONFIDENTIAL NOTICE**  
 ALL INFORMATION ON THIS SHEET IS THE SOLE PROPERTY OF  
 Roll-2-Roll Technologies LLC.  
 All Rights Reserved. © Copyright 2025.



UNLESS OTHERWISE SPECIFIED:  
 ALL DIMENSIONS ARE IN MM  
 TOLERANCES UNLESS NOTED:  
 INCH MILLIMETER  
 X.X ±0.040 X.X ±1  
 X.XX ±0.02 X.XX ±0.5  
 X.XXX ±0.0075 X.XXX ±0.25  
 THIRD ANGLE PROJECTION  
 DO NOT SCALE DRAWING

	NAME	DATE
DRAWN	AS	01-APR-25
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		
COMMENTS:		

<b>Roll-2-Roll Technologies</b>		
Website: <a href="https://r2r.tech">https://r2r.tech</a>		
Phone: +1-888-290-3215		
Email: <a href="mailto:engineering@r2r.tech">engineering@r2r.tech</a>		
TITLE: 1DC 288-xx No Mounting Bracket		
SIZE	DWG. NO.	REV
B	1DC 288-xx	
SCALE: 1:3	WEIGHT:	SHEET 1 OF 1

8 7 6 5 4 3 2 1

D  
C  
B  
A

D  
C  
B  
A